











110100 (3)




FUEL GAS VALVE





Aprilaire[®]



Model 1870

130 PINTS/DAY

110/120VAC.60 HZ

MAX NORMAL OPERATING AMPS = 10.4 A

COMPRESSOR LOCKED ROTOR AMPS: 54A

COMPRESSOR RATED LOAD AMPS: 9.4A

MAXIMUM CURRENT AMPACITY (MCA): 13A

MAXIMUM OVERLOAD PROTECTION (MOP): 20A

FAN RATED POWER: 125W

THERMALLY PROTECTED MOTORS

REFRIGERANT 410A, 25 OZ

MAXIMUM DESIGN PRESSURE (PSIG): HIGH 395 LOW 160

US PATENTS:

#5,547,017, 5,881,806, 6,431,268, 7,574,871

CANADIAN PATENTS:

#2,245,135 AND OTHERS PENDING

SERIAL NO. 052021A38060



RESEARCH PRODUCTS CORPORATION
MADISON, WI 53701

⚠️ WARNING

RISK OF ELECTRIC SHOCK. CAN CAUSE INJURY OR DEATH. DISCONNECT ALL REMOTE ELECTRIC POWER SUPPLIES BEFORE SERVICING.

⚠️ AVERTISSEMENT

RISQUE DE CHOCS ÉLECTRIQUES. PEUT CAUSER DES BLESSURES ET MÊME ENTRAÎNER LA MORT. COUPER LES SOURCES D'ALIMENTATION À DISTANCE AVANT LE DÉPANNAGE.

⚠️ CAUTION

MOVING PARTS. HOT PARTS. DO NOT OPERATE UNIT WITH ACCESS PANELS REMOVED.

⚠️ ATTENTION

PIÈCES MOBILES. LAS TRÈS CHAUDES. NE PAS







INSULATED FLEXIBLE DUCT

INSULATED FLEXIBLE DUCT

6"



































FILTER REQUIRED
Must be changed every 30 days
Failure to do so may void the warranty
CAUTION
ATTENTION

Aprilaire



HUNG-RITE





Apraire

FILTER ACCESS
Push bottom of filter
cover in clockwise direction
to remove filter.
CAUTION
ATTENTION



Humid-Rite
























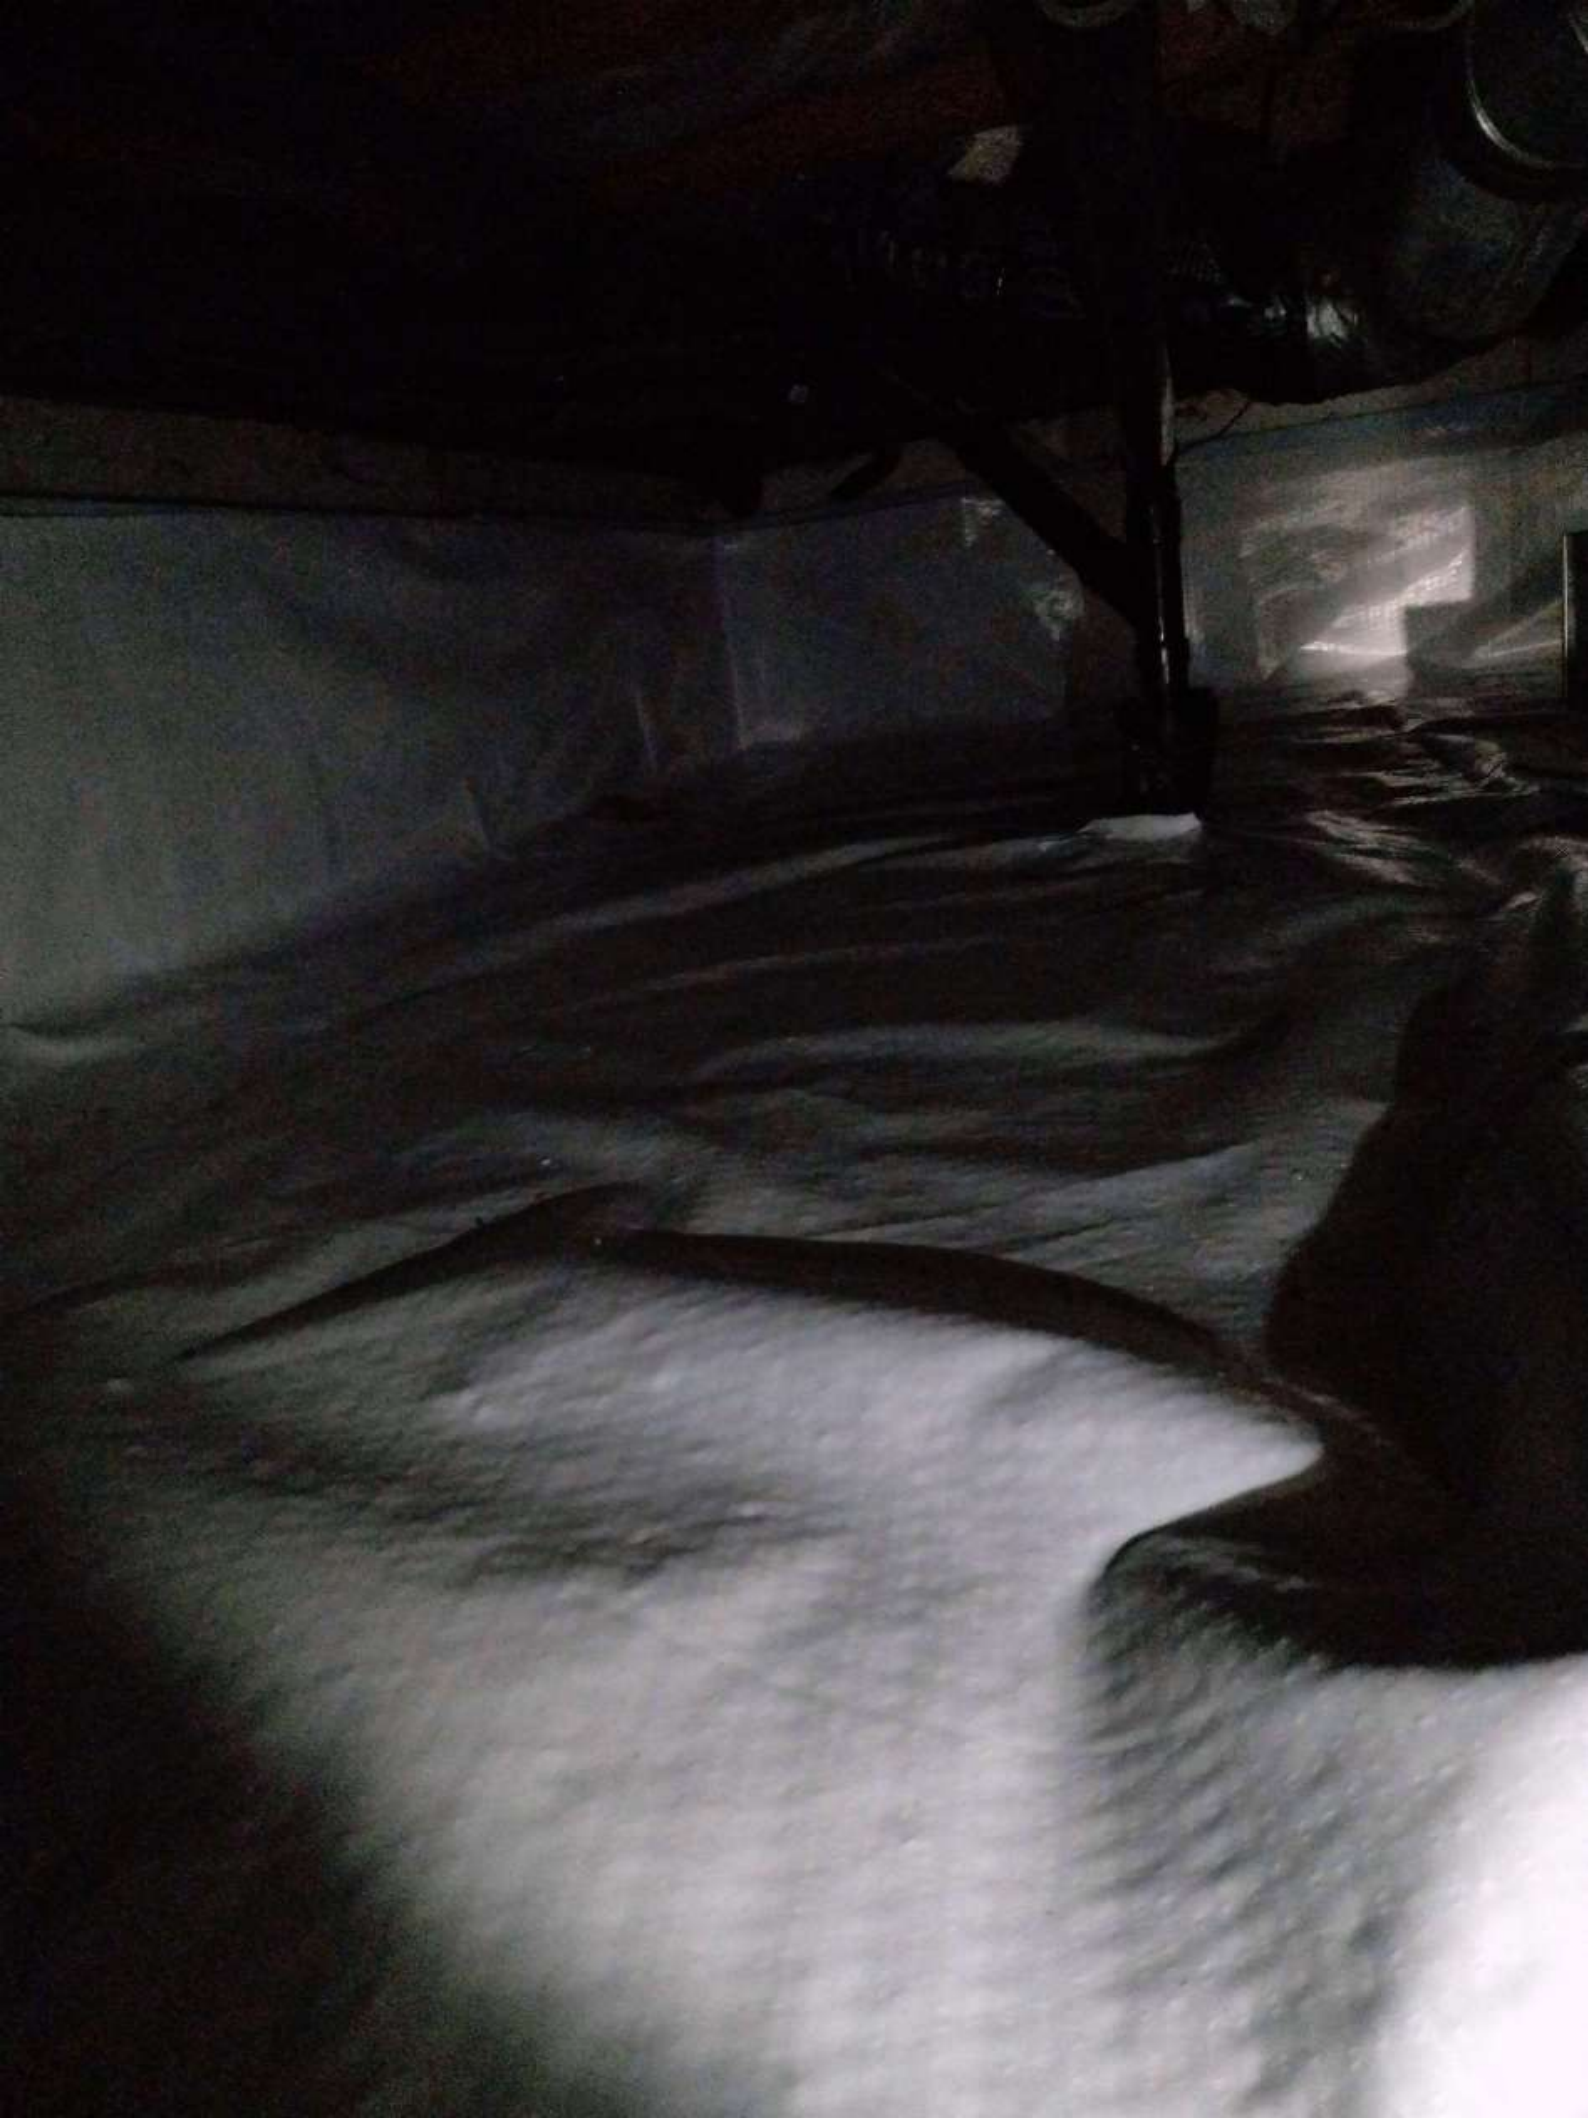













Aprilaire[®]



Model 1870

130 PINTS/DAY

110/120VAC 60 HZ

MAX NORMAL OPERATING AMPS = 10.4 A

COMPRESSOR LOCKED ROTOR AMPS: 54A

COMPRESSOR RATED LOAD AMPS: 9.4A

MAXIMUM CURRENT CAPACITY (MCA): 13A

MAXIMUM OVERLOAD PROTECTION (MOP): 20A

FAN RATED POWER: 125W

THERMALLY PROTECTED MOTORS

REFRIGERANT 410A, 25 OZ

MAXIMUM DESIGN PRESSURE (PSIG): HIGH 395 LOW 160

US PATENTS:

#5,547,017, 5,881,806, 6,431,268, 7,574,871

CANADIAN PATENTS:

#2,245,135 AND OTHERS PENDING

SERIAL NO. 052021A38060



RESEARCH PRODUCTS CORPORATION











